


# MODEL 2017



SPECIFICATION	
AC A	200/600A ±1.5%rdg±4dgt [50/60Hz] (200A) ±1%rdg±3dgt [50/60Hz] (600A) ±2%rdg±5dgt [45Hz~1kHz]
AC V	200/600V ±1%rdg±2dgt [50/60Hz] ±1.5%rdg±4dgt [45Hz~1kHz]
Ω	200Ω ±1.2%rdg±2dgt
Continuity buzzer	Buzzer sounds below 30±20Ω
Conductor Size	Ø33mm max.
Frequency Response	45Hz~1kHz
Withstand Voltage	5550V AC for 1 minute
Applicable Standards	IEC 61010-1 CAT.III 600V Pollution Degree 2 IEC 61010-2-031
Power Source	6F22 (9V) × 1
Dimensions	208(L) × 91(W) × 40(D)mm
Weight	400g approx.
Accessories	7066A (Test leads) 9079 (Carrying case) 6F22 × 1 Instruction Manual
Optional	8008 (Multi-Tran)

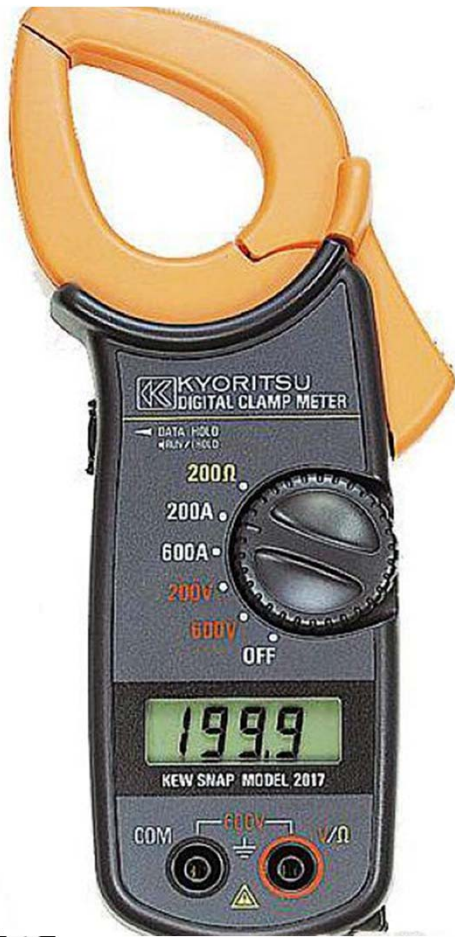